



Fascia and Top Back Installation Instructions

Contents

1.0 Tools	1
2.0 Installation	1
2.1 Bracket Hole Marking	2
2.2 Top/Back Cover and Shade Installation	2
2.3 Fascia Installation	3


This document provides installation instructions for fascia and top/back cover applications.

1.0 Tools

Screw gun with Phillips head bit extender; Standard and Phillips head screwdriver; level; tape measure; drill bit for mounting screws.

2.0 Installation

Exploded view of the top/back cover with fascia

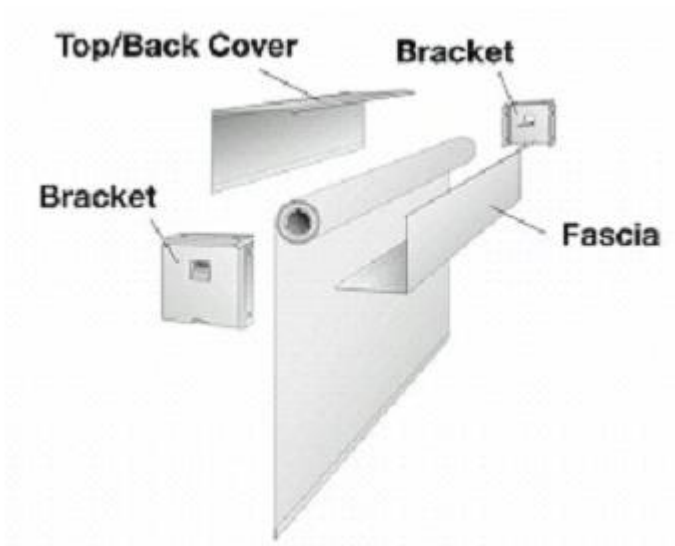




Fascia and Top Back Installation Instructions

2.1 Bracket Hole Marking

Surface mount application shown in the pictures.


Top back cover must be installed together with the fascia mounting brackets for surface or ceiling mount.

Use the bracket to mark holes in mounting surface, then pre-drill holes in the top/back cover. Remove the protective layer from the double sided on the top/back cover. The exposed tape will assist in

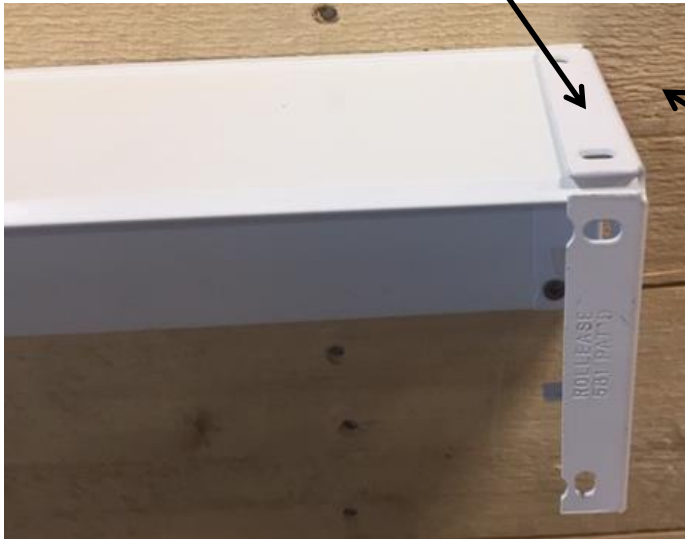

Slide the top/back cover underneath the upper bracket flange.

2.2 Top/Back Cover and Shade Installation

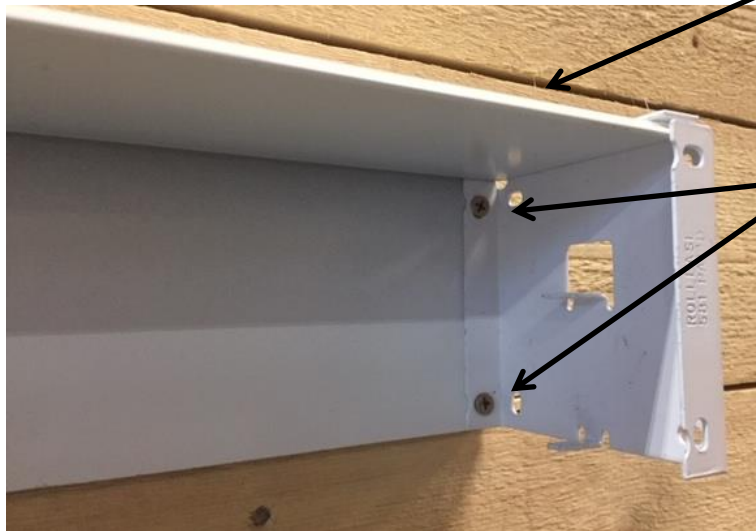

The front edge of the top/back cover is slightly curved downward to accommodate fascia insertion.


Secure each bracket with mounting screws (not supplied).

Install the shade.
Set upper and lower limit.
Check for fabric telescoping and adjust



Fascia and Top Back Installation Instructions

2.3 Fascia Installation

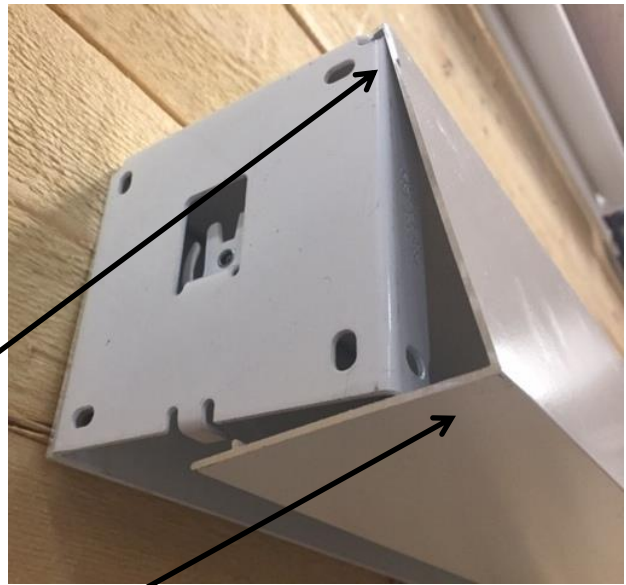

Insert fascia into the lip for both brackets. Push fascia toward the back of both brackets.



.The fascia snaps onto the tang of both brackets. The fascia is secure and will not move. If the fascia is not secure, check the tang to ensure it is not bent up. Carefully bend the tang down so the fascia engages with the tang.

For outside mount, secure the end caps.